


ID: **FBCJ-02**

J/A-N(2ZN)H FLAT DROP FRP max. 2F

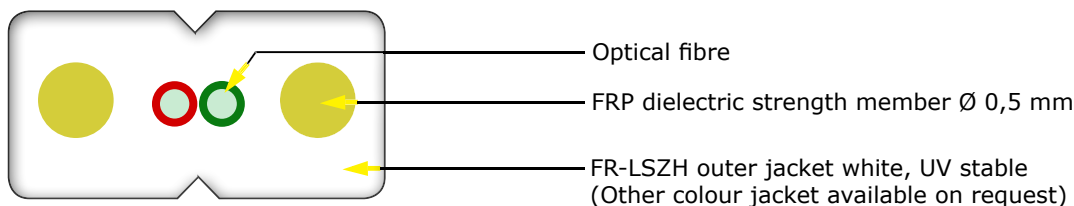

Applications:

- Internal FTTH applications horizontal and riser

Features:

- The mechanical characteristics of jacket meet the requirements of relevant standarts
- Soft, flexible, easy to lay and splice, and with big capacity data transmission
- Meet various requirements of market and clients
- Single mode optical fiber mating ITU-T G.657A
- Reaction to fire class Eca according to fire standard: EN 50575

Cable Parameters:

Parameter	Unit	Value
Crush(short term)	N/100 mm	1000
Strength member		FRP
Storage temperature	°C	-20 to 60
Instalation temperature	°C	-5 to 50
Operating temperature	°C	-20 to 60
Primary buffer diameter	µm	250
Fiber count	n	1 to 2
Nominal outer diameter	mm	2.0x3.0±0.2
Nominal weight	kg/km	8
Maximum tensile load	N	80
Minimum bend radius	mm	15
Drum length	1000m, 2000m (Other length available on request)	
Drum size	mm	380x370x340
Fiber colour coding	1.Red, 2.Green (Other fibre colour sequences available on request)	