

Fiber Optic Splice Closure series: H



model: ARC H31

Applications:

- Fiber to the building (FTTB)
- Fiber to the home (FTTH)
- For use in outdoor application
- Wall mounted and pole installation
- Aerial, Direct Buried and Underground (shaft)
- Straight and Branch installations


Features:

- Dome type
- Protection Level: IP68
- Suitable for protecting fibre cable splices
- Slots for Mini type splitter body
- Resistance to vibration, UV and temperature fluctuation
- Sealing Structure Silicon Gum Material
- Easily re-enter without any tools, saves time and cost
- Rugged construction for long term reliability



Technical Information:

Height size	125mm
Width size	248mm
Length size	330mm
Base Type	Mechanical Sealing
Cable Entrance	4 ports + 8 drop ports with integrated SC adapters
Cable diameter port	up to Ø7-12mm
Cable diameter drop port	up to 3mm
Max number of Splice Trays	3
Core capacity per splice tray	12
Core capacity per Closure	36
Dome & Base Material	PP (Polypropylene)

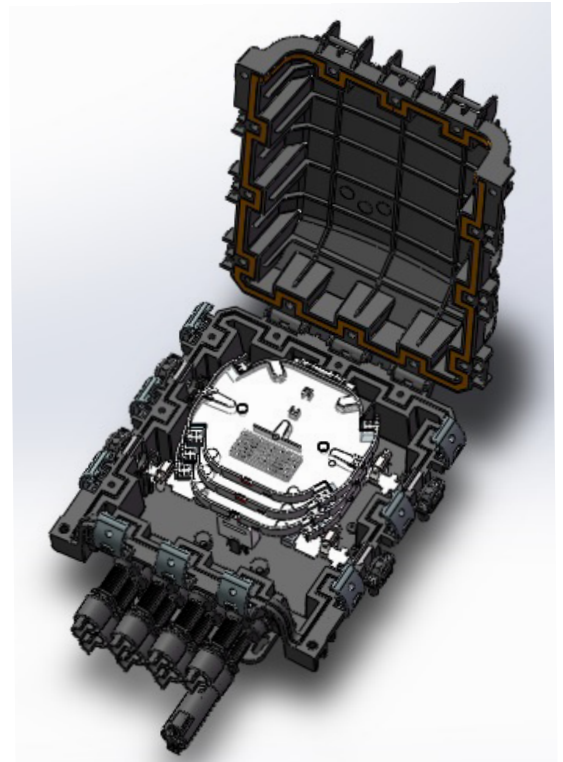

Accessories included in Package Content:

- Protection sleeves, Transport tubes, Wall mounted and pole mounted brackets

