


ID: **FBCT-12**

J/A-DQ(BN)H max. 12F

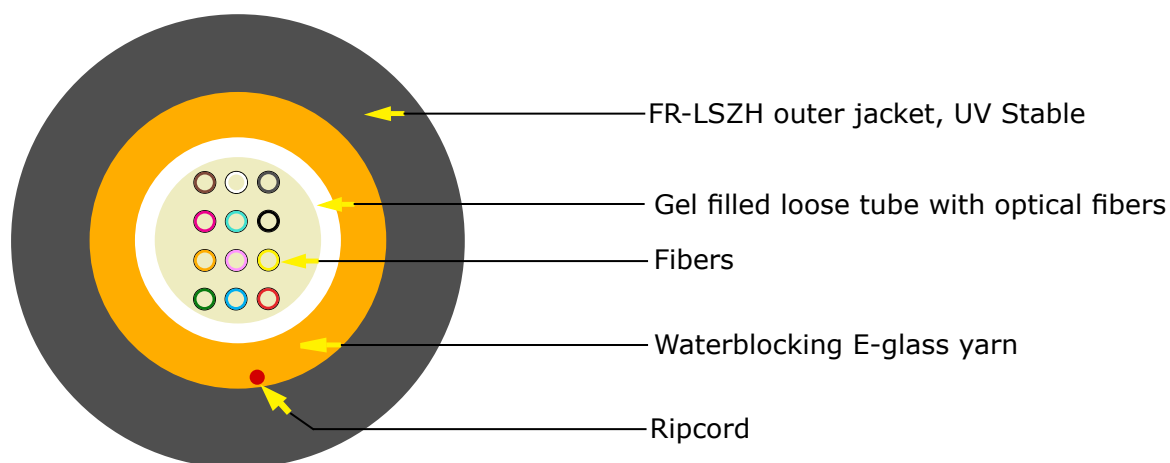

Applications:

- This cable is suitable for indoor or outdoor installation.
- Standard rodent protection.

Features:

- The mechanical characteristics of jacket meet the requirements of relevant standards
- Soft, flexible, easy to lay and splice, and with big capacity data transmission
- Meet various requirements of market and clients
- Reaction to fire class Eca according to fire standard: EN 50575

Cable Parameters:

Parameter	Unit	Value
Crush resistance test	N	2000
Storage temperature	°C	-20 to 60
Installation temperature	°C	-5 to 50
Operating temperature	°C	-20 to 60
Outer jacket thickness	mm	1±0.1
Fiber count	n	4 to 12
Nominal outer diameter	mm	6.0±0.2
Nominal weight	kg/km	30
Loose tube diameter	mm	2.5
Max. tensile strength	N	1100
Min. bend radius (no load)	x OD	15
Min. bend radius (load)	x OD	20
Drum length	m	2000
Fiber colour coding	1.Red, 2.Green, 3.Blue, 4.Yellow 5.White, 6.Grey, 7.Brown, 8.Violet 9.Turquoise, 10.Black, 11.Orange, 12.Pink	